


For light holes between walls less than 5.4 meters

The channel is reinforced beams StiroFert and betorniran before mounting on walls.

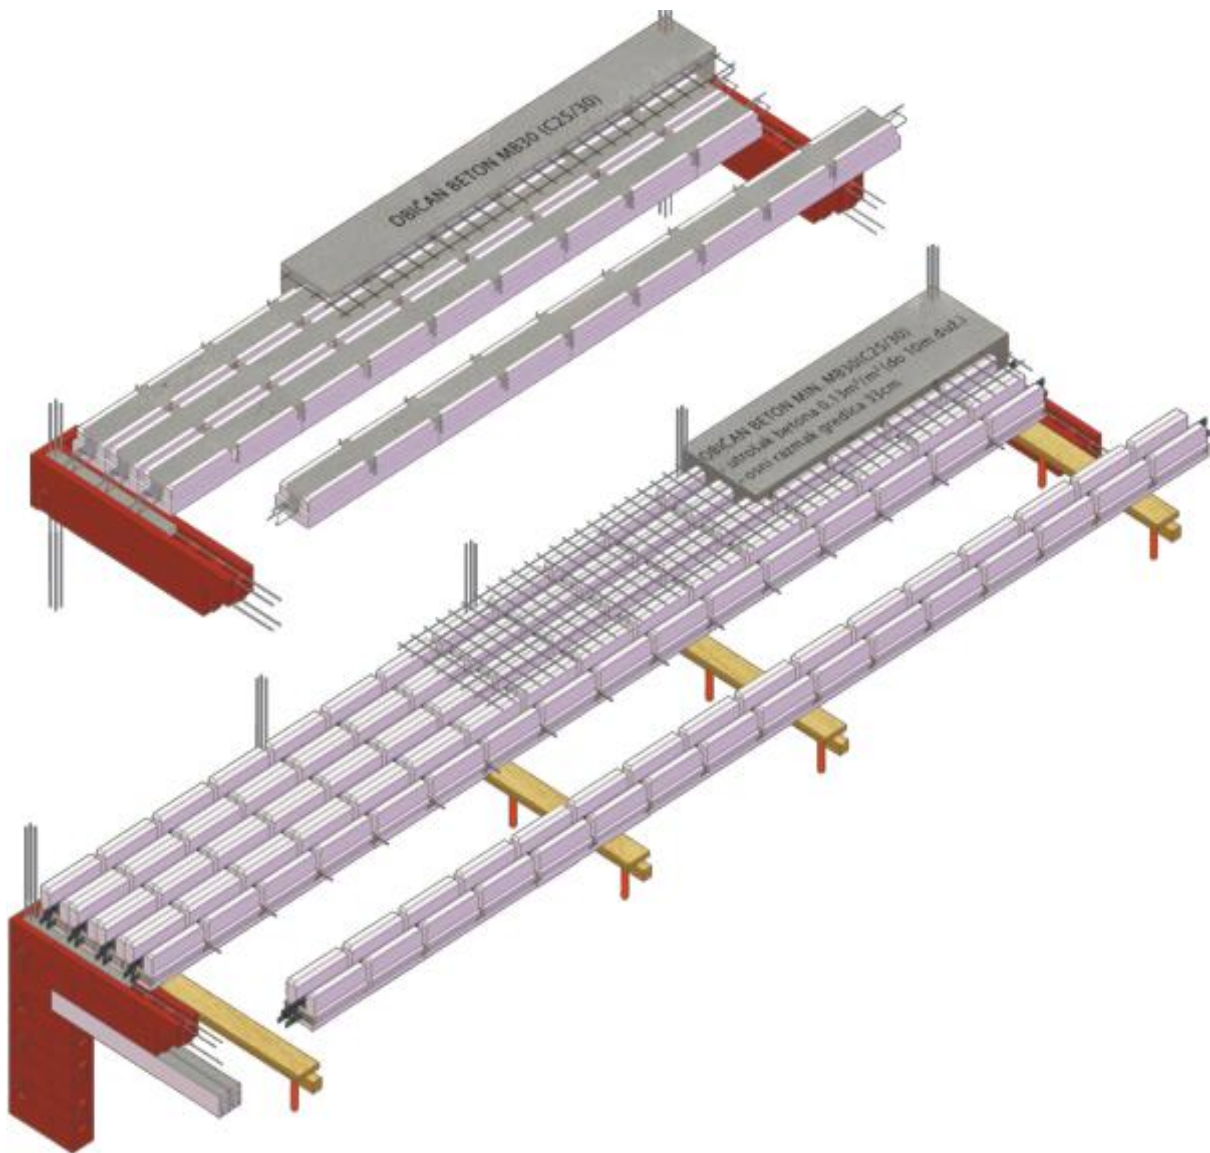

4cm thick concrete slab is subsequently performed, from ordinary concrete.